

NMCU Series

(Ultra Flat Low Profile Niobium Chip Capacitors)


Features

A niobium capacitor is a polar capacitor.
Low profile niobium chip capacitors developed to meet growing needs for flat capacitors where height is critical.
Small and low profile: Obtained by thinning the NMC type.

Product symbol : (Example) NMCU Series B case 4V 47 μ F $\pm 20\%$

NMCU	B	0G	476	M	T	R	F
Type of series							
				Terminal code			
				Packing polarity code			
				Packing method code (T:carrier tape)			
				Capacitance tolerance code (M : $\pm 20\%$)			
				Capacitance code			
				Rated voltage code			
				Case size code			

Outline of drawings and dimensions

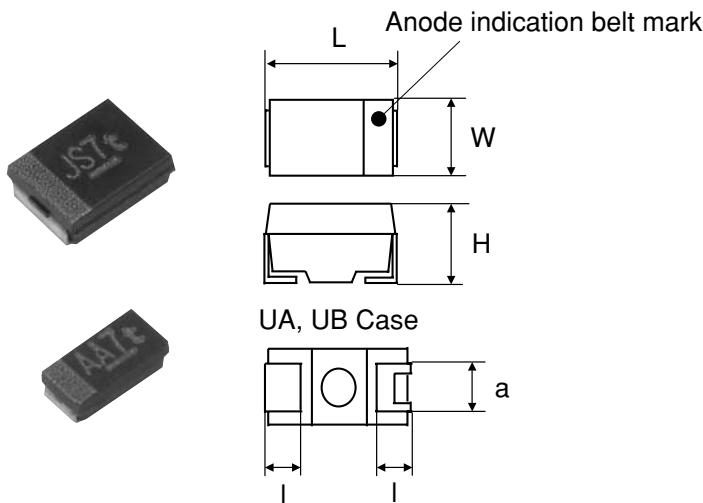

Dimensions (Unit : mm)

Case code	Case size				
	L ± 0.2	W ± 0.2	H ± 0.2	I ± 0.3	a ± 0.2
UA	3.2	1.6	1.2	0.7	1.2
UB	3.5	2.8	1.2	0.7	1.8

Standard value and case size


Capacitance	Rated voltage (V.DC)			
	2.5	4	6.3	10
μ F	Code	0E	0G	0J
1.0	105			
1.5	155			
2.2	225			
3.3	335			
4.7	475			UA
6.8	685			UB
10	106		UA	UB
15	156	UA	UA	UB
22	226	UB	UB	UB
33	336	UB	UB	UB
47	476	UB	UB	

For ratings not covered in the table, consult Holy Stone Polytech.

Product specifications	NMC					Test conditions JIS C5101-1:1998
	Operating temperature range	-55°C ~ +105°C				
Rated voltage	DC2.5 ~ 10V					85°C
Surge voltage	DC3.0 ~ 12V					85°C
Derated voltage	DC1.7 ~ 6.7V					105°C
Capacitance	4.7 ~ 47 μ F					120 Hz, 1.5V
Capacitance tolerance	$\pm 20\%$					Paragraph 4.7, 120 Hz, 1.5V
Leakage current	Refer to Standard product table					Paragraph 4.8, in 5 minutes after the rated voltage is applied.
$\tan \delta$	Refer to Standard product table					Paragraph 4.8, 120Hz, 1.5V
Temperature characteristics	Specified initial value	-55	85	105		
	$\Delta C/C$	-	-20 ~ 0%	0 ~ +20%	0 ~ +25%	Paragraph 4.24
	$\tan \delta$ Value shown table or less	0.30	0.39	0.36	0.39	
	LC	0.02CV	0.02CV	0.2CV	0.25CV	
Solder heat resistance	$\Delta C/C \pm 30\% \text{ or less}$					Reflow 260°C 10 ± 1 sec.
Moisture resistance no load	$\tan \delta$	Specified initial value table or less				Paragraph 4.22
	LC	Specified initial value table or less				40°C, 90 ~ 95%RH, 500hrs
	$\Delta C/C$	$\pm 30\% \text{ or less}$				Paragraph 4.23 85°C, The rated voltage is applied for 2000 hrs.
Thermal shock	$\tan \delta$	Specified initial value table or less				Leave at -55°C, normal temperature, 105°C, and normal temperature for 30 min., 3 min., 30 min., and 3 min. Repeat this operation 5 times running.
	LC	200% Specified initial value table or less				
	$\Delta C/C$	$\pm 20\% \text{ or less}$				
Moisture resistance load	$\tan \delta$	Specified initial value table or less				40°C, 90 ~ 95%RH, The rated voltage is applied for 500 hrs.
	LC	200% Specified initial value table or less				
Failure rate	1% / 1000hrs					85°C. The rated voltage is applied (through a protective resistor of 1 Ω/V).

■ Operating Voltage

※ The voltage derating factor should be as great as possible.
Under normal conditions, the operating voltage should be reduced to 80% or less of the rated.

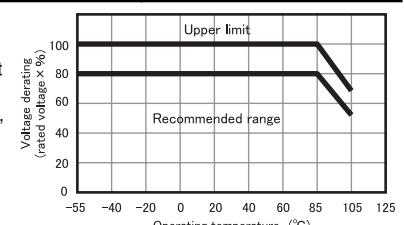

※ This catalog is designed for providing general information.


Please inquire of our Sales Department to confirm specifications prior to us.

Standard product tables - NMCU series

Standard product table - NMCU series

Rated voltage V. DC	Capacitance μF	$\tan\delta$	Leakage current μA	Case code	Product name
2.5	15	0.30	0.8	UA	NMCUA0E156
	22	0.30	1.1	UB	NMCUB0E226
	33	0.30	1.7	UB	NMCUB0E336
	47	0.30	2.4	UB	NMCUB0E476
4	15	0.30	1.2	UA	NMCUA0G156
	22	0.30	1.8	UB	NMCUB0G226
	33	0.30	2.6	UB	NMCUB0G336
	47	0.30	3.8	UB	NMCUB0G476
6.3	10	0.30	1.3	UA	NMCUA0J106
	15	0.30	1.9	UB	NMCUB0J156
	22	0.30	2.8	UB	NMCUB0J226
	33	0.30	4.2	UB	NMCUB0J336
10	4.7	0.30	0.9	UA	NMCUA1A475
	6.8	0.30	1.4	UB	NMCUB1A685
	10	0.30	2.0	UB	NMCUB1A106
	15	0.30	3.0	UB	NMCUB1A156

Marking indication

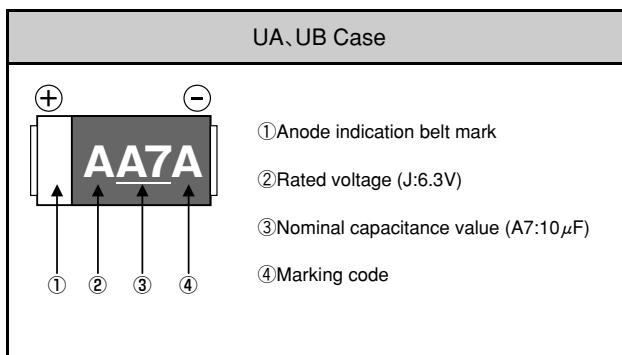

Marking code

Month Year \	1	2	3	4	5	6	7	8	9	10	11	12
2011	a	b	c	d	e	f	g	h	j	k	l	m
2012	n	p	q	r	s	t	u	v	w	x	y	z
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z